




output capacity 100V	240W
output capacity RMS 8Ω	240W
frequency range	50Hz - 16kHz
zones	5
direct output	70V / 100V / 4Ω
LED level indicator	yes
tone control	yes (individual)
output	yes (REC)
amp in	yes
pre-amp out	yes
MIC input	4(1)
AUX input	4(1)
tape input	0
chime function	yes
priority levels	5 (evacuation / tel / MIC-318 / MIC / sirene, chime)
power supply	240V AC / 24V DC
power consumption	320W
dimentions (h x w x d)	132 x 484 x 399mm
weight	20.15kg
accessories	microphone MIC-318 / MIC-511C / MIC-621A

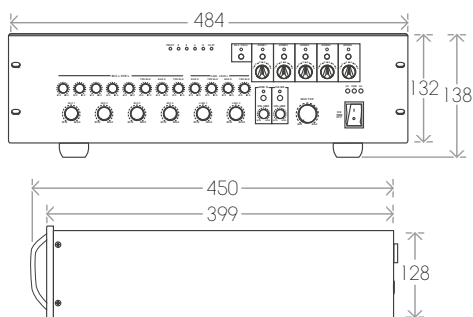

MX-240S

5-ZONE 19" SELECTIVE MIXING AMPLIFIER

This compact integrated amplifier generates 240W. You can instantly create five zones operating independently (a single source simultaneously). They each have their own volume level and selective PA option.



The music in the refrigeration aisles is louder than in the checkout area of this supermarket. What's more, you can put out calls for staff per zone.