




MX-120T

TABLETOP MODEL OR 19" MIXING AMPLIFIER

Compact, universal mixing amplifier that produces 120W. The MX-120T has a built-in tuner and treble and bass control. It also has individual input control (3 channels) and is protected against short-circuiting and thermal overload.

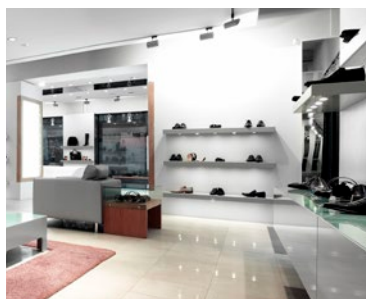

The MX-120T is a highly versatile amplifier. For use in a shoe shop, but also a local sports hall, council chamber or school – they are all within its scope.

output capacity 100V	120W
output capacity RMS 8Ω	120W
frequency range	50Hz - 15kHz
zones	1
direct output	70V / 100V / 4 - 8Ω
LED level indicator	yes
tone control	yes
built-in source	AM/FM tuner - 100 presets
output	no
amp in	yes
pre-amp out	yes
MIC input	2 (XLR/Phoenix) 2 RCA
AUX input	2 RCA
tape input	-
chime function	yes
priority levels	2 MIC
power supply	240V AC / 12V DC
power consumption	210W
dimensions (h x w x d)	88 x 484 x 300mm - 2RS
weight	15kg
extra	brackets for 19" rack assembly
accessories	microphone MIC-621A

